



## HARDWARE WRITE PROTECT ISSUE OF WINBOND 2M FWH/LPC

### GENERAL DESCRIPTION

In order to enhance the function of 2M FWH/LPC devices, Winbond provides a new 2M FWH/LPC chips in which the hardware write protect feature has been added. The detail specification of this new feature is described as following.

### DETAIL DESCRIPTION

There are two key pins, #TBL and #WP, related to this new hardware write protect feature.

#### 1. #TBL Function:


The #TBL pin is used to protect the top boot block under chip write (program/erase) command. When this pin is set to low before program/erase command, the top boot block will be protected. This function is compatible with SST's SST49LF002A/ SST49LF020.

#### 2. #WP Function:

The #WP pin is used to protect the whole chip, i.e., when the pin is set to low, the whole chip including the top boot block will not be programmed/erased, regardless the state of #TBL. This function is not fully compatible with SST's SST49LF002A/SST49LF020. For SST, the #TBL pin protects the whole chip except the boot block.

The following diagram shows the difference between Winbond and SST devices:

#WP #TBL vs. Memory Map:

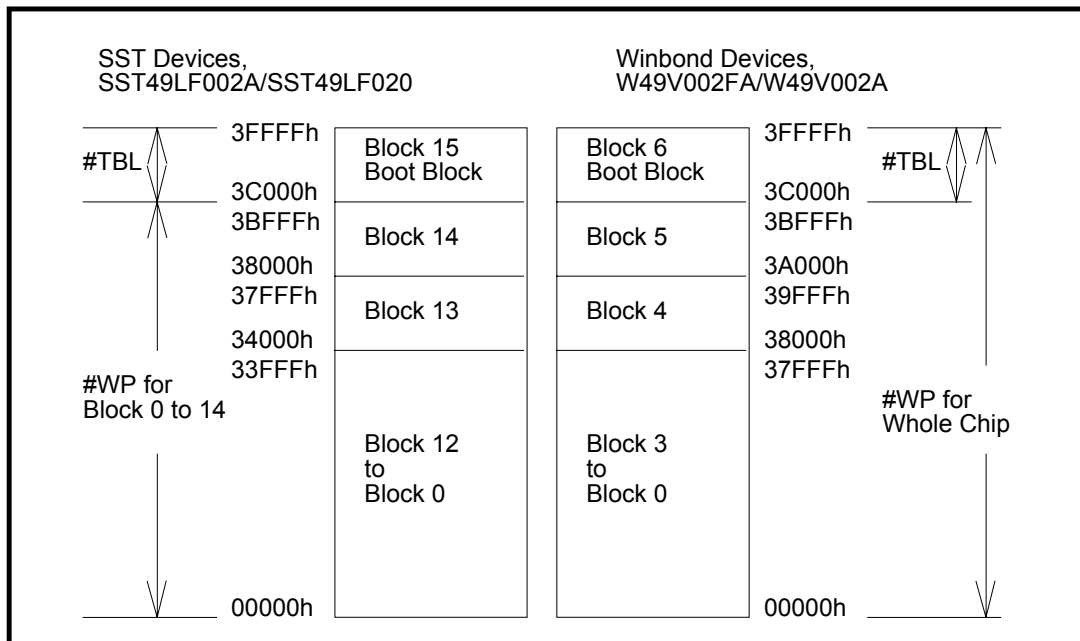

# HARDWARE WRITE PROTECT ISSUE OF WINBOND 2M FWH/LPC



## CONCLUSION

For hardware designers or software designers, the wirings and usage of these two pins are all the same between Winbond and competitors. But the hardware write protect feature of Winbond devices is not 100% fully compatible with other competitors' devices. When alternatively using these different brand devices, system users who want to protect this device should notice the difference and to prevent any unintentionally mistake occurs.



### Headquarters

No. 4, Creation Rd. III,  
Science-Based Industrial Park,  
Hsinchu, Taiwan  
TEL: 886-3-5770066  
FAX: 886-3-5665577  
<http://www.winbond.com.tw/>

### Taipei Office

9F, No.480, Rueiguang Rd.,  
Neihu Chiu, Taipei, 114,  
Taiwan, R.O.C.  
TEL: 886-2-8177-7168  
FAX: 886-2-8751-3579

### Winbond Electronics Corporation America

2727 North First Street, San Jose,  
CA 95134, U.S.A.  
TEL: 1-408-9436666  
FAX: 1-408-5441798

### Winbond Electronics Corporation Japan

7F Daini-ueno BLDG, 3-7-18  
Shinyokohama Kohoku-ku,  
Yokohama, 222-0033  
TEL: 81-45-4781881  
FAX: 81-45-4781800

### Winbond Electronics (Shanghai) Ltd.

27F, 2299 Yan An W. Rd. Shanghai,  
200336 China  
TEL: 86-21-62365999  
FAX: 86-21-62365998

### Winbond Electronics (H.K.) Ltd.

Unit 9-15, 22F, Millennium City,  
No. 378 Kwun Tong Rd.,  
Kowloon, Hong Kong  
TEL: 852-27513100  
FAX: 852-27552064

*Please note that all data and specifications are subject to change without notice.  
All the trade marks of products and companies mentioned in this data sheet belong to their respective owners.*